

REAR HANDLEBAR COVER

REMOVAL/INSTALLATION

Remove the following:

- Front center cover (page 3-4)
- Front handlebar cover (page 3-6)

Release the Meter/handlebar switch wire harness band bosses from the frame.

Release the Meter/handlebar switch wire harness from the clamp.

Disconnect the following:

- Meter/handlebar switch 9P connectors
- Front brake light switch 3P connector
- Rear brake light switch wire connectors
- Speedometer cable


Remove the following:

- Two screws from the front side
- Screw from the rear side

Remove the rear handlebar cover.

Installation is in the reverse order of removal.

Route the wire harness properly (page 1-17).

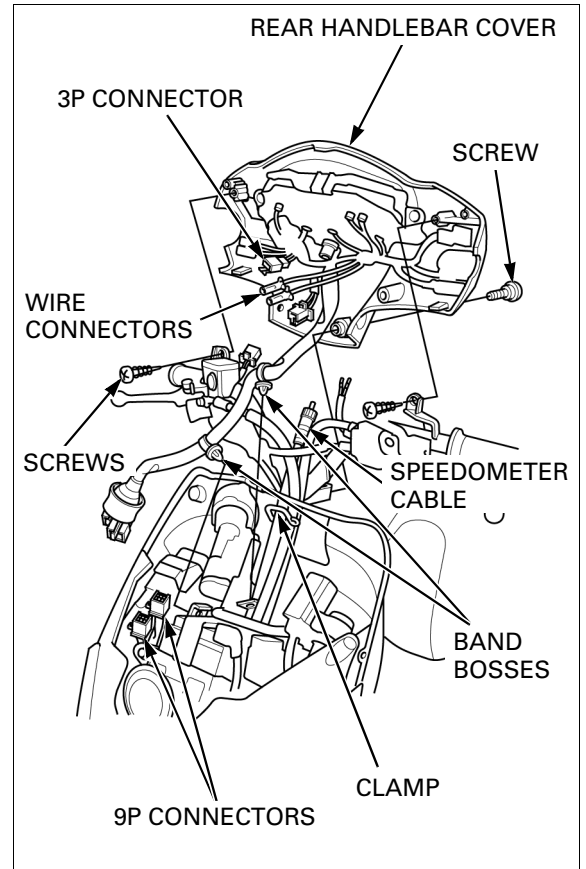

UNDER COVER

REMOVAL/INSTALLATION

Remove the front cover (page 3-6).

Release the main wire harness from the clamp and move it, then remove the upper bolt.

Remove the two bolts from the both side.

Remove the under cover and disconnected the fuel tank tray drain hose.

Installation is in the reverse order of removal.

Connect the fuel tank tray drain hose properly (page 1-17).

