

# LIGHTS/METERS/SWITCHES

## DISASSEMBLY/ASSEMBLY

Remove the four screws and meter lens from the meter case.

Remove the meter plate from the meter case.

Remove the six terminal screws and pull out the five bulb sockets.


Remove the two clamp screws and meter harness.

Hold the meter panel and remove the two screws and meter panel.

*Route the meter harness as shown in the illustration.*

Assembly is in the reverse order of disassembly.

- Be careful not to put fingerprints on the meter panel.

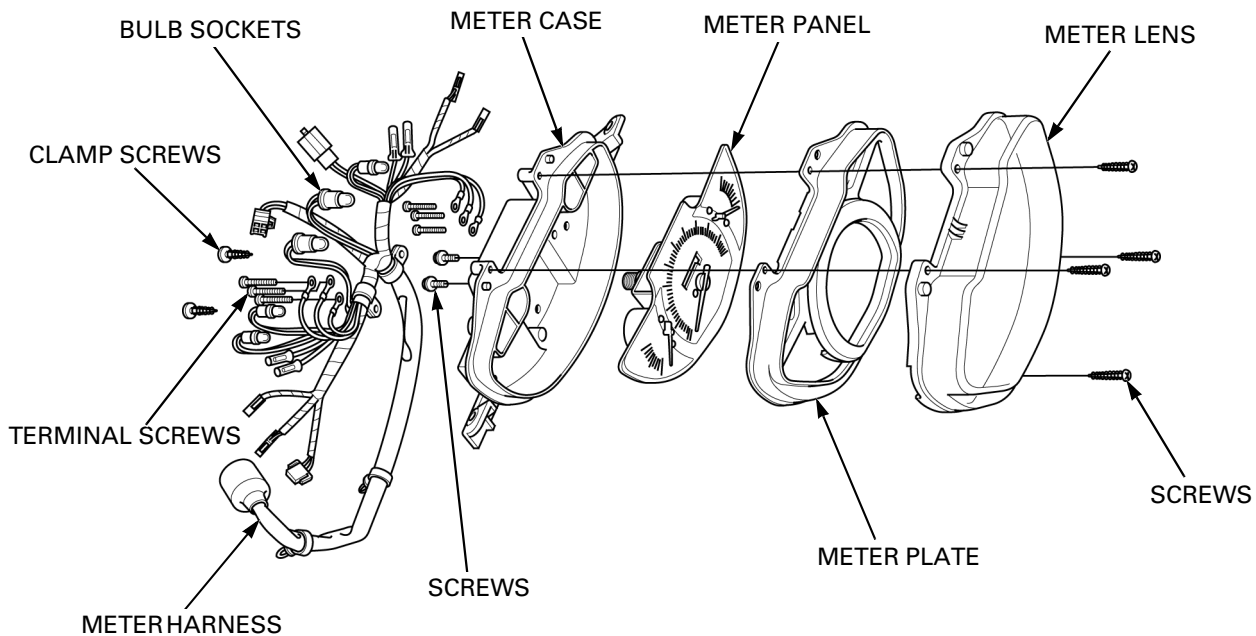

### SPEEDOMETER HARNESS ROUTING:

